



ACCESS HATCH GUARD

- Installs without perforating roof membrane
- 225 lb rating
- Adaptable to any size access hatch
- Quick and easy, permanent and temporary installation
- Multiple installation configurations to meet your specific needs

METALTECH[®]



REGULATIONS/STANDARDS

- | | |
|----------|---------------|
| ✓ NBC* | ✓ RSST |
| ✓ CSTC | ✓ OBC |
| ✓ CNESST | ✓ OSHA |
| ✓ ANSI | ✓ WORKSAFE BC |

**BUILT TOUGH FOR
SAFETY**


* Our guardrail system can be used in the construction field and for the maintenance of buildings, excluding houses and small buildings as defined in Article 1.3.3. of Division A of the National Building Code (NBC), which are buildings of no more than 3 floors and having an area of not more than 600 m² for non-industrial use.

ACCESS HATCH GUARD

A system according to your needs to prevent falls into access hatches or protect a skylight


- Quick and easy installation
- Adaptable to all access hatch dimensions

TWO TYPES OF INSTALLATION

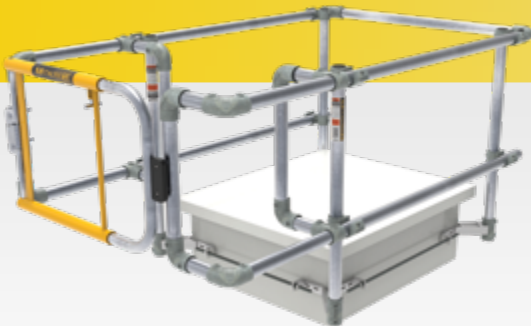

COMPRESSION ATTACHMENT

Without perforation for permanent or temporary installation.

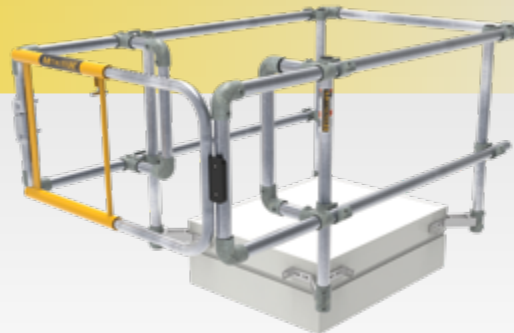

ANCHORED GUARDRAILS

Using screws on the metal drip edge of the access hatch for a permanent solution.

TWO CLEARANCE ZONE OPTIONS



NO CLEARANCE

One foot between the access hatch and the door. Advantageous for tight spaces.



HANDRAILS

Two feet between the access hatch and the door, with a handrail to exit the access hatch.

SELF-CLOSING EXTENDABLE DOOR




The extendable door can be adjusted from 32 to 46 inches.

Made of aluminum and steel for easy adjustment

SPECIFICATIONS

MATERIALS	Tubes and posts: 6061-T6 aluminum - 1.9 in. OD or galvanized steel 1.9 in. O.D. Clamps and joints: galvanized steel. Brackets: made of galvanized steel, robust and simplified to have the least amount of hardware.
COMPRESSION	Use of threaded rod and galvanized steel nuts to ensure adequate tightness.
FIXATION	The guardrail can be fixed to the access hatch or skylight using anchor screws.
DOOR	• Retractable and extendable from 32 to 46 in. • High visibility orange color.
USE	• Permanent installation on the roof. • Adaptable for a personalized solution. • Railings can be installed around a skylight or access hatch.
COMPLIANCE WITH	NBC, CSTC, CNESST, ANSI, RSST, OBC
COMPATIBILITY	Standard and stackable guardrail systems.

DISTANCE / DIMENSION TO RESPECT WHEN INSTALLING THE GUARDRAIL.

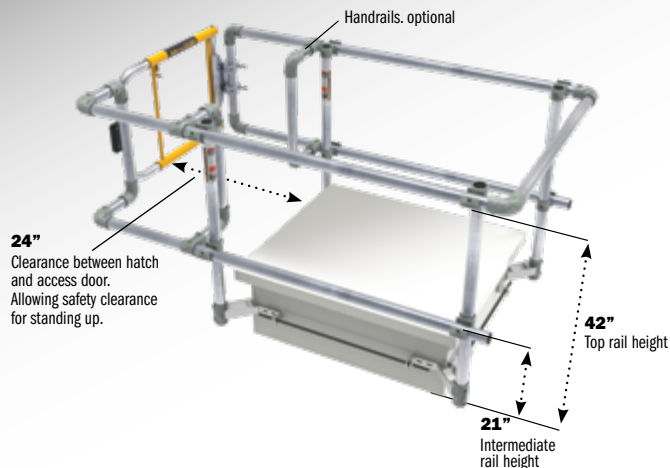

METALTECH®

WWW.D1SAFETY.COM

info@d1safety.com

Metaltech is a registered trademark of Metaltech-Omega inc. | www.metaltech-omega.com | NOTE: Pictures and descriptions in this brochure may differ from actual product. S-MTH-NA-EN02